



STAYFLOW STRAINERS DATA SHEET


FYF - CS

Fabricated Y-Strainer
Carbon Steel

FYF - SS

Fabricated Y-Strainer
Stainless Steel

Both Styles Available
150 lb., 300 lb. & 600 lb.
Flanged and Butt Weld

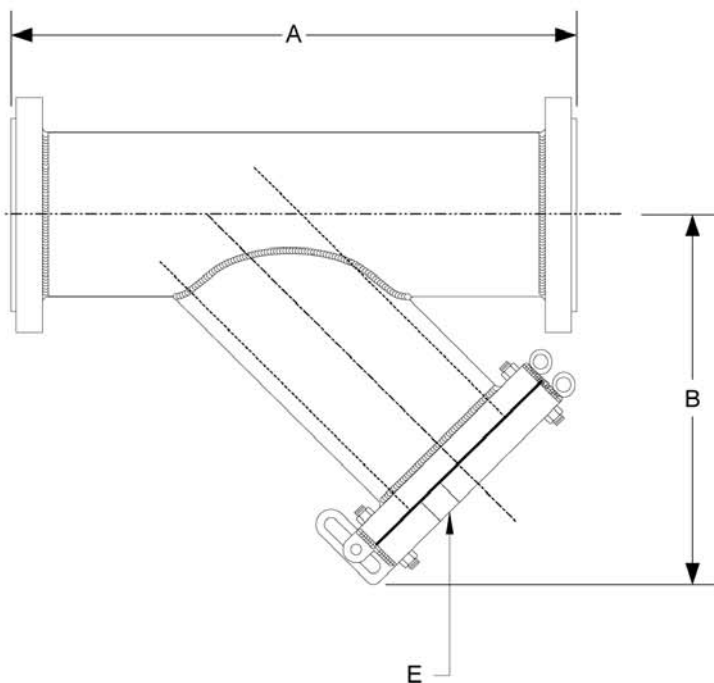

Parts List

- Body Material – As Required
- Connections – As Required
- Screen Perforations – As Required
- Special Features – As Required

SIZE		DIMENSIONS										WEIGHTS			
		A				B				E					
		150#		300#		150#		300#		150# / 300#		150#		300#	
in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	lbs	kgs	lbs	kgs
10	250	30	762	31	787	24	610	24	610	1-1/2	40	390	177	600	272
12	300	35	889	36	914	26	660	27	686	1-1/2	40	560	254	840	381
14	350	39	991	41	1041	30	762	32	813	2	50	800	363	1100	499
16	400	45	1143	47	1194	34	864	36	914	2	50	1000	454	1500	680
18	450	46	1168	50	1270	34	864	36	914	2	50	1150	522	1775	805
20	500	52	1321	55	1397	38	965	40	1016	2	50	1400	635	2100	953
24	600	60	1524	62	1575	44	1118	46	1168	2	50	2000	907	3100	1406
30	750	75	1905	78	1981	56	1422	59	1499	2	50	3000	1361	5150	2336

Consult factory for sizes not shown.

†This table reflects only the nearest metric equivalents.

FLOW COEFFICIENTS

Size	C _v
10"	1549.5
12"	2166.2
14"	3130.7
16"	4664.4
18"	5850.2
20"	7747.6

Certified Dimensional Drawings and
Metric Drawings Available